

WIMCO PAC



Reliable. Robust. Rugged.

AUTOMATIC CARTONING MACHINE



Features :

Optimum speed 140 Cartons/Minute.

Easy & fast changeover's.

Automatic prefolded leaflet insertion device.

High level of adaptability for various applications.

TECHNICAL SPECIFICATIONS :

Carton size range :

Breadth	Height	Length
Min. 18	18	85
Max. 84	50	215

POWER CONSUMPTION :

Max. - 1.5 KW excluding vacuum pump

AIR CONSUMPTION :

Max. - 100 LPM @ 2 kg/cm²

VACUUM REQUIREMENT :

650-700 mm of Hg

**Wimco Engineering,
For complete packaging solutions**



STANDARD FEATURES WITH MACHINE

- Automatic carton erection
- Automatic product insertion into carton
- Machine with SS 304 guards
- Inbuilt centralised lubrication
- No product, no carton
- No carton, product by-pass
- No leaflet, no carton
- Variable frequency drive
- Online rejection of empty carton
- Designed to handle both reverse & straight cartons


OPTIONAL FEATURES WITH MACHINE

- Closing of cartons by hot melt adhesive
- Tubular cover Aluminium or SS 304 with Acrylic or Polycarbonate housing
- Machine interconnections with tube filling machine
- Electronic product counter & time totaliser
- Flame proofing
- Brush insertion system
- Automatic pre-folded leaflet insertion device in carton
- GMP Version
- PLC based machine operation
- Automatic inkjet printing device
- Soap cartoning system
- Bottle cartoning system
- Blister insertion attachment

MACHINE WEIGHT

PAC Cartoner - 2000 KGS

MACHINE LAYOUT

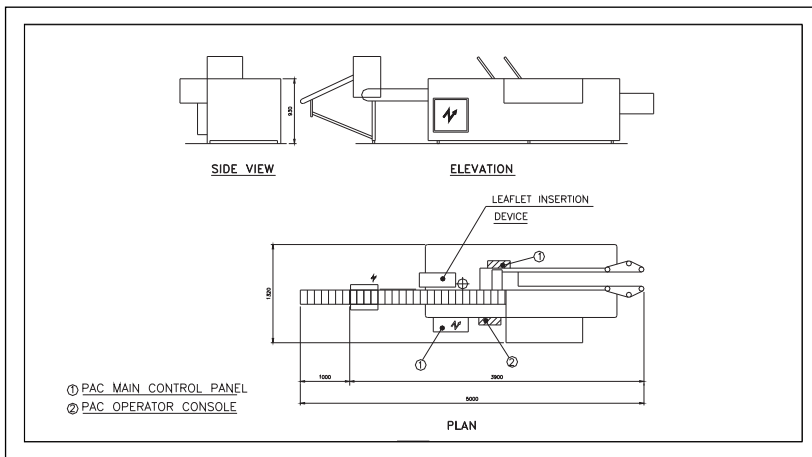

The above specifications are subject to change without any prior notice

Wimco Limited
Engineering Division
Kalyan - Badlapur Road
Ambarnath - 421 505
Dist. Thane (Maharashtra)
India.

Phone : Office - 91-251-268 3982 / 268 1586
Board No - 91-251-268 2281 Ext - 239 / 240

Fax - 91-251-268 2665
Fax - 91-251-268 1874
Email : engg@wimco.in

Visit us on : www.wimcoengineering.com